

AUXILLARY

Offset Lifting Beam up to 5t



Manufacturer - Reds Global

Model up to 5t

When the crane is required to operate in tight inaccessible areas or work areas with limited head room, our offset lifting beams offer easier load positioning.

Lifting capacity 2.5t @ 2500mm and 5t @ 1500mm respectively.

Each offset beam is supplied with lifting gear and safety shackles.


Each offset beam is provided with full handover and SOP.

Specifications

- Varying counterweight configurations
- Easy to use and operate
- Increases cranes minimum radius
- Certified lifting gear supplied

Spec Sheet

Offset Lifting Beam up to 5t

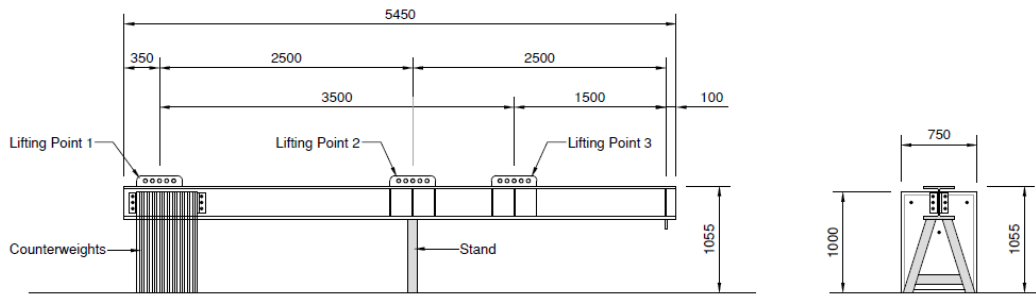

OFFSET LIFTING BEAM 3		
CAPACITY TABLE		
2500MM OFFSET (MIDDLE LIFT POINT) UTILISING LIFTING POINTS DENOTED 1 & 2		
COUNTERWEIGHTS		
No. PLATES	PLATE MASS (kg)	WLL (kg)
6	870	500
12	1740	1000
18	2610	1500
24	3480	2000
30	4350	2500
TARE BEAM WEIGHT (NO COUNTERWEIGHTS) = 1500kg		

OFFSET LIFTING BEAM 3		
CAPACITY TABLE		
1500MM OFFSET (END LIFT POINT) UTILISING LIFTING POINTS DENOTED 1 & 3		
COUNTERWEIGHTS		
No. PLATES	PLATE MASS (kg)	WLL (kg)
6	870	1000
11	1595	2000
16	2320	3000
21	3045	4000
26	3770	5000
TARE BEAM WEIGHT (NO COUNTERWEIGHTS) = 1500kg		

This spec sheet is provided for information only and is subject to change.